


ValueJet

ValueJet VJ-1628X

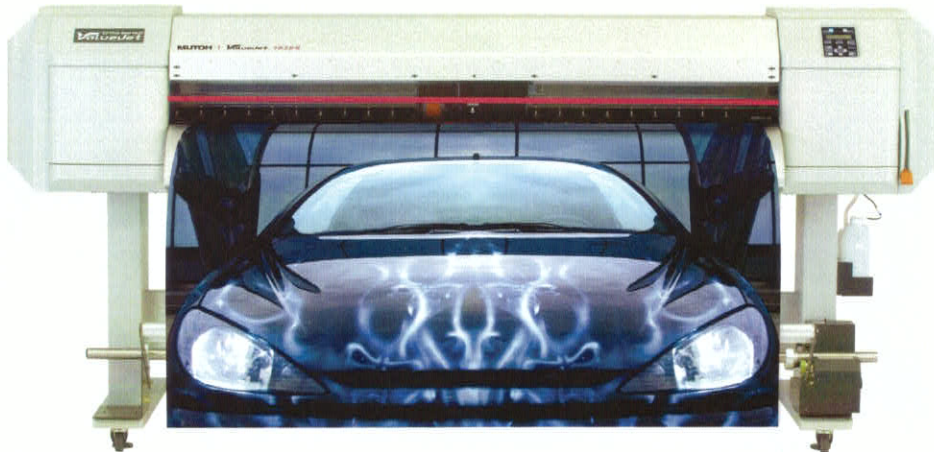

High performance printer with white and metallic inks

The VJ1628X is a performance printer with all the same smart features as the VJ1624 plus it includes Mutoh's exclusive Drop Master print automation technique which assures the highest dot placement accuracy and eliminates the need for individual head adjustments per individual media type.

With four ink configurations offering up to eight colors including CMYK, Lc, Lm, white and metallic inks, the possibilities for creative output are endless.

Product Highlights

- Performance printer, featuring highest dot placement accuracy
- "The Wrapper's Choice" printer now with white and metallic ink.
- Mutoh Metallic Color Library give you 506 metallic blended colors
- Print speeds up to 600 sqf/hr

Application Possibilities


Print high quality 1440 dpi output for photographic output or create custom wraps, banners, indoor and outdoor signs, POP displays and trade show graphics. Plus, with metallic ink you can draw attention to design details for a brighter and more eye catching image.



MUTOH

ValueJet

ValueJet VJ-1628X

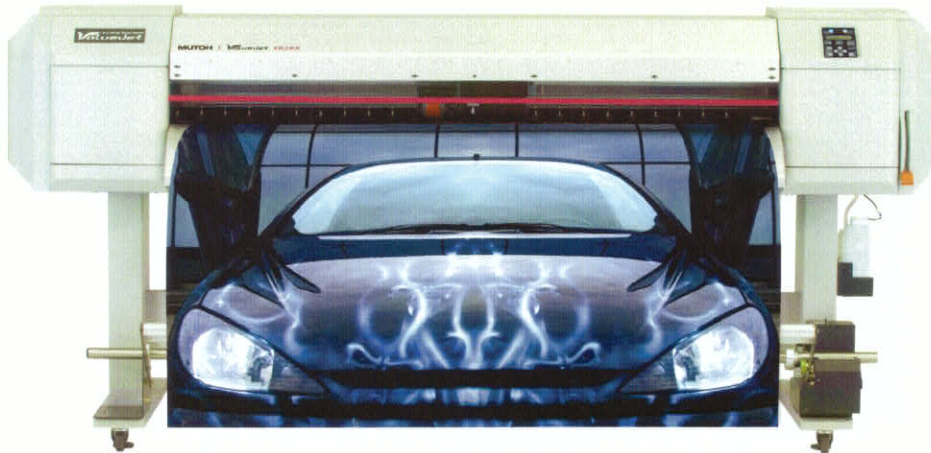

64" Sign & Display Printer

SPECIFICATIONS

Technical Key Specifications

Print Technology	Drop-on-demand Micro Piezo Inkjet Technology
Print Head	1
Nozzle Configuration	180 nozzles x 8 lines
Drop Mass Range (pl)	3.5
Head Heights (mm)	1.5 / 2.5 / 4.0

Media Specifications

Max. Media Width	1625 mm (63.97")
Max. Print Width	1615 mm (63.58")
Max. Media Thickness	0.3 / 1.3 mm *

* Max. media thickness is specified per head height

Media Measurements * Ø 150 mm / 2" & 3" / 30 kg

* Standard non-motorised roll off system

Media Drying System Individually controlled pre-heater, fixer & dryer (30 - 50 °C)

Ink Specifications

Ink Types	Eco Ultra
Ink Volume	CMYK: 220ml, 440ml, 1000ml*
	Lc, Lm: 220ml, 440ml Lk: 440ml only
	White & Metallic: 220ml only

*: 1000 ml bag requires optional adapter

Ink Colour Options	CMYK x 2 / CMYK, Lc, Lm, Lk /
	CMYK, Lc, Lm, W, MT / CMYK, Lc, Lm, W, W

Performance

High Quality (720 x 1080)	5.0 m ² /h
Quality (720 x 720)	7.5 m ² /h
Quality Production (720 x 1080)	10 m ² /h
Production (720 x 720)	14.5 m ² /h
Speed Production (720 x 720)	20.5 m ² /h
Billboard (360 x 720)	29.1 m ² /h

Based on CMYK x 2 printing mode*

Power Consumption

During Printing	< 600 W
In Stand-by	45 W
Warming Up	≤ 1100 W (main) & ≤ 1200 W (heat)
Power Supply	AC 100-120 V /
	AC 200-240 - 60/50 Hz

Recommended Working Environment

Temperature	22 °C - 30 °C with Δt: max. 2 °C/h
Humidity	40 % - 60 % (no condensation)
	with ΔRH: max. 5% RH/h

Machine Measurements

Width x Depth x Height	2698 x 885 x 1261 mm
Weight	160 kg

Distributed by:

42-A JALAN USJ 1/33
47600 SUBANG JAYA
SELANGOR MALAYSIA

+603-8024 3922
+603-8024 3923

+603-8023 4922

+6012-205 3188 (FELICIA)

www.rkt.com.my

RKT
technology sdn bhd

MUTOH