




SFM-12, SSM-12

MESH

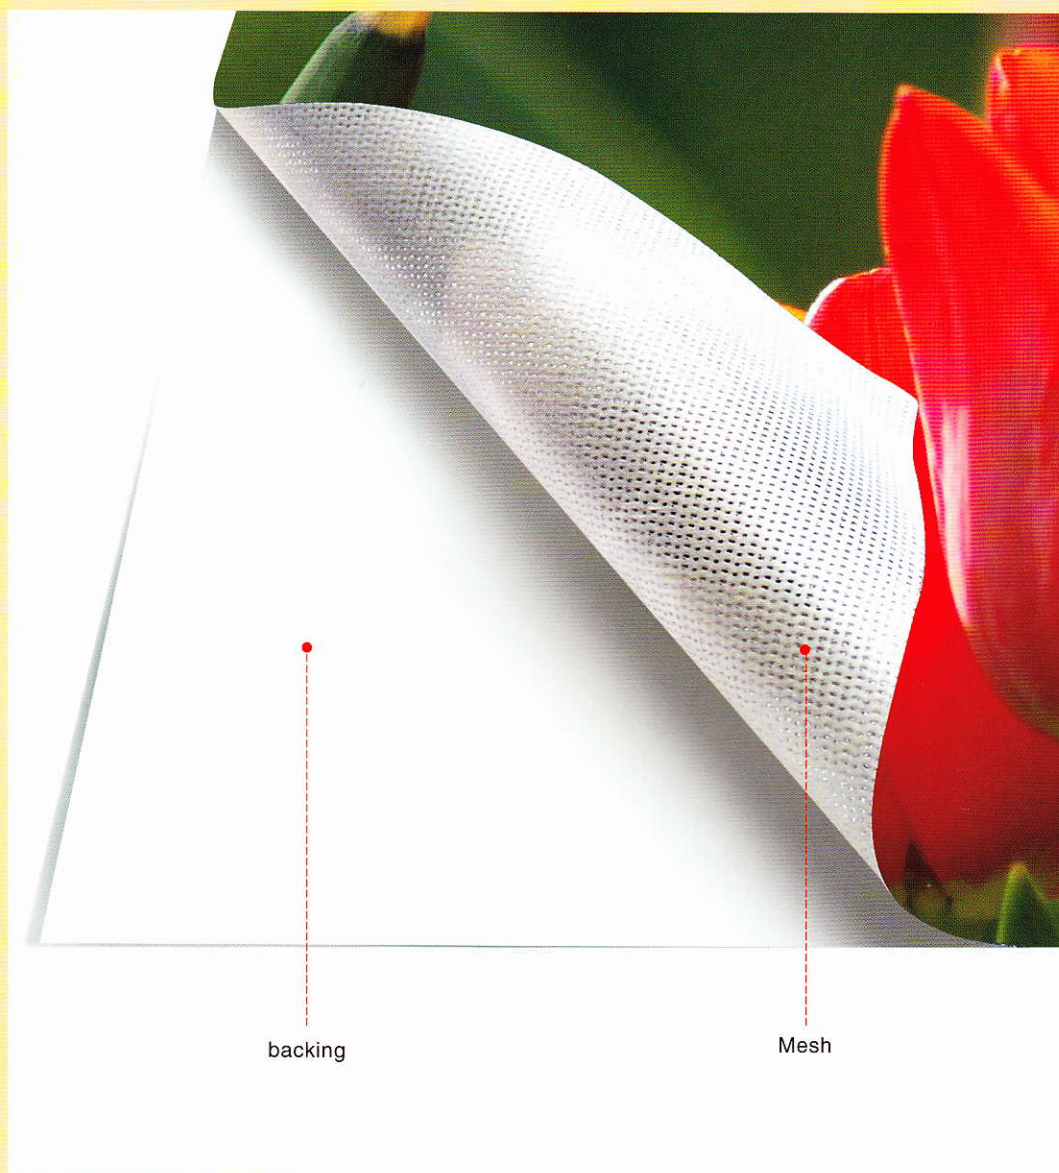

Starflex, The Professionals' Media

manufactured by **Starflex**

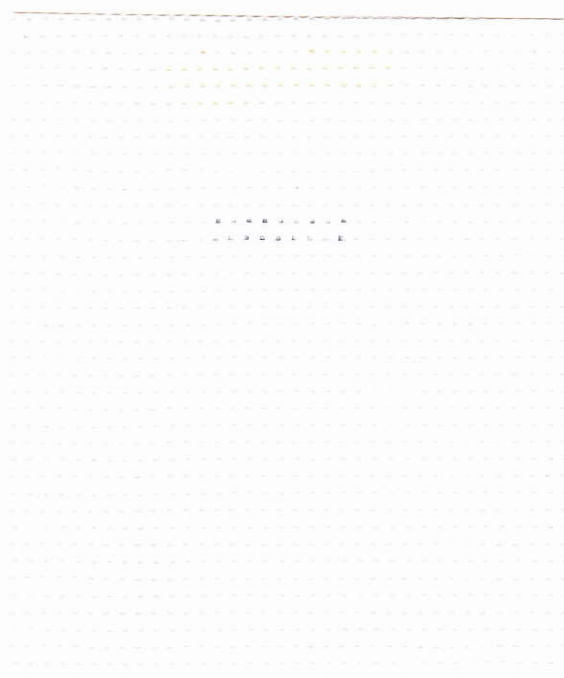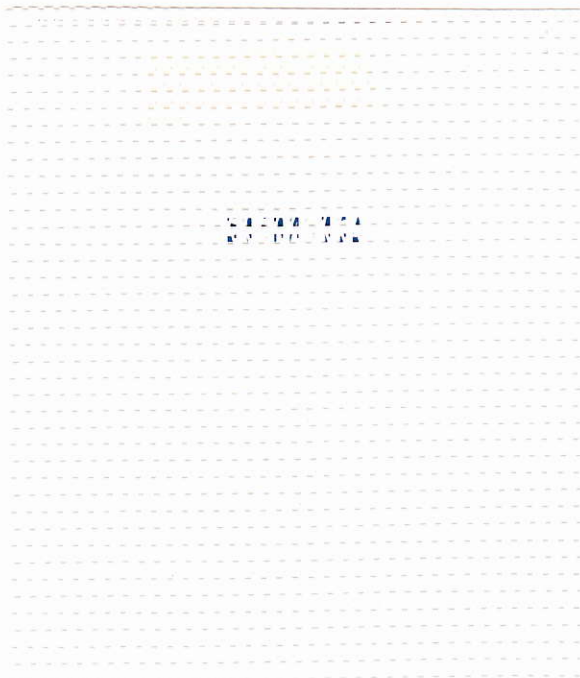

Features & Applications

SFM-12

- Width : 80cm (31")~ 220cm(87"), 250cm(98"), 320cm(125") and 530cm(210") seamless
- White knitted substrate for small and wide format front-lit display

SSM-12

- Width : 80cm (31")~ 220cm(87")
- Mesh with fabric backing
- Easy printing without leaking ink
- Simply tear-off backing after printing
- Building murals & wraps, indoor wall decoration, banners, trade show and in-store display
- Weather resistant
- Printable with Vutek, Scitex, Nur, Mimaki, Roland, Mutoh, Jeti, Seiko and etc.

Specification

(1000Dx1000D, 12x12)

Properties	Test Method	Unit	Result
Transmittance	ASTM E 424 6.5.2	%	N/A
Tensile Strength	ISO 13934-1:1999 C.R.E.CUT STRIP METHOD	KGF/5CM	L : 195.5 W : 164.5
Tearing Strength	ISO 13937-2:2000 C.R.E.SINGLE TEAR METHOD	KGF	L : 36.8 W : 27.9
Elongation	ISO 13934-2:2000 C.R.E.CUT STRIP METHOD	%	L : 23 W : 21
Adhesion Strength	ISO 2411.C.R.E	KGF/5CM	13.7
Flexing Endurance at Low Temp.	DIN53351	CYCLES	16000
Resistance to Low Temp.	DIN53351		-20℃
Resistance to High Temp.	DIN53351		80℃
Resistance to Weathering	ASTM G26, XENON ARCLAMP, 18MIN SPRAY/2HRS., 100HRS. EXPOSURE		NO CHANGE
Practice for operating light-exp. With and without water	ASTM G26, METHOD A, TYPE B, WEATHER-O-METER	GRADE	4