



SFF-15 16 Front-Lit

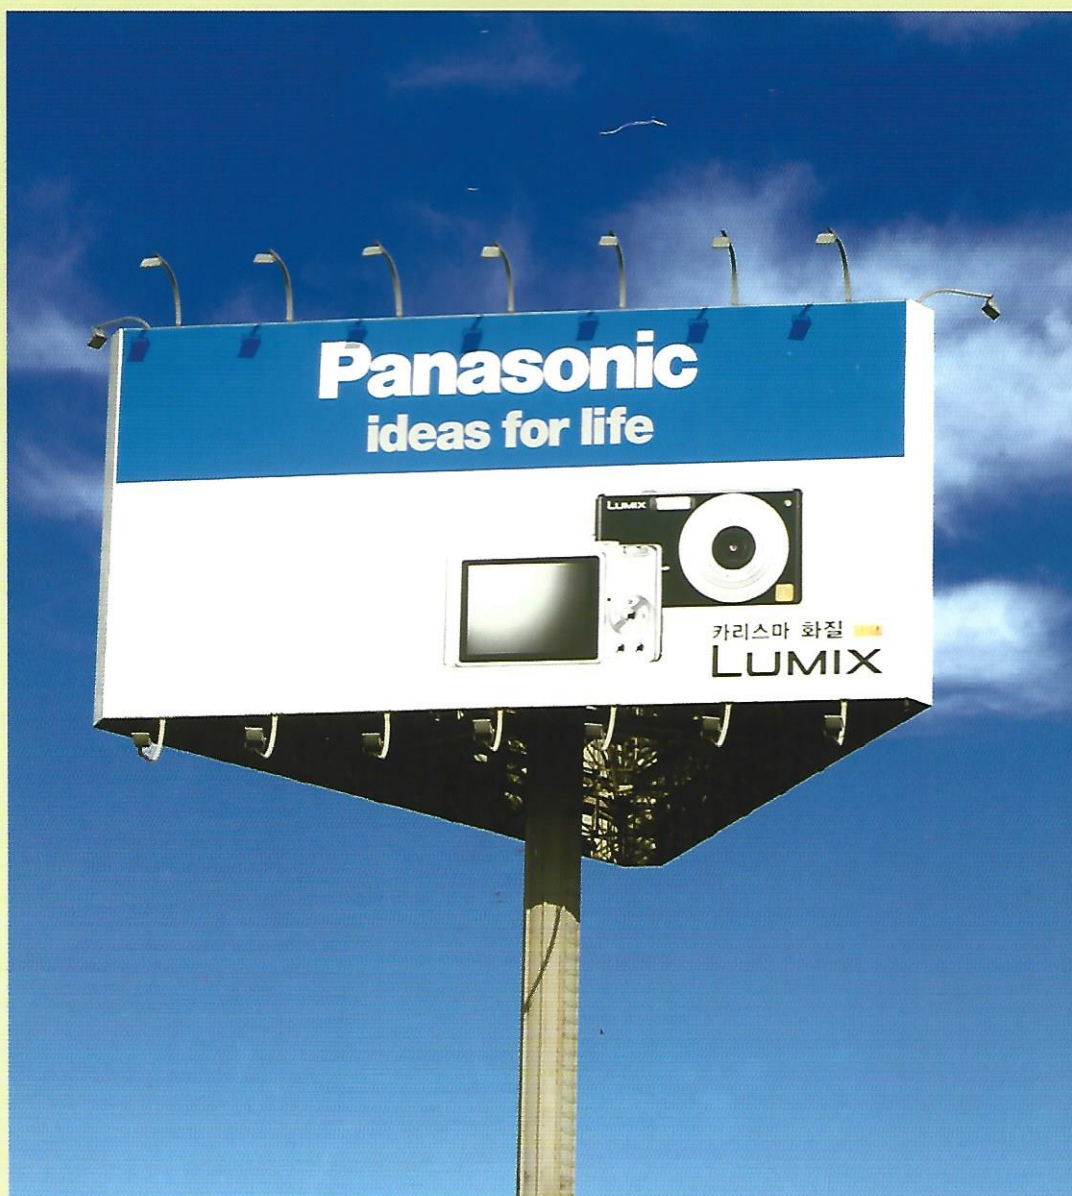

Starflex, The Professionals' Media

manufactured by **Starflex**

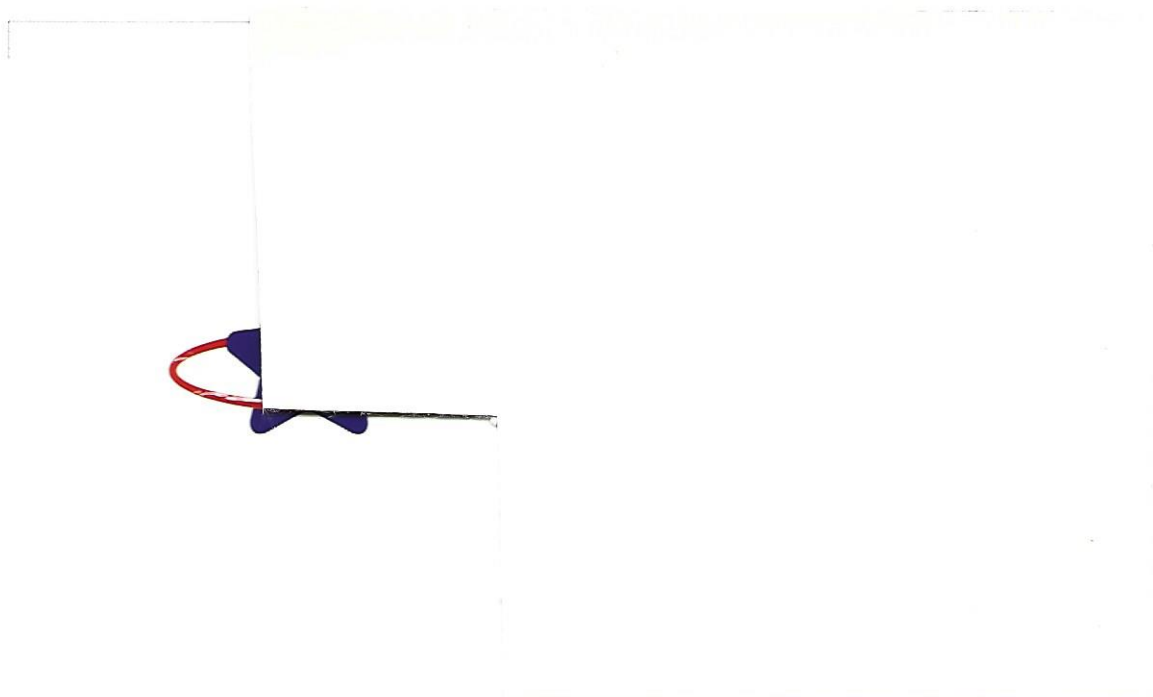

Features & Applications

- Width : 80cm(31"), 220cm(87") and 250cm(98") and 320cm(125")
- White opaque substrate for small and wide format front-lit display
- Coated style • Specially designed for changeable temperature
- Excellent ink absorption and restoration
- Billboard, banners, building murals and in-store display
- Matt & glossy available • Weather resistant
- Printable with Vutek, Scitex, Nur, Mimaki, Roland, Mutoh, Jeti, Seiko and etc.

Specification

(1000Dx1000D, 16x16)

Properties	Test Method	Unit	Result
Transmittance	ASTM E 424 6.5.2	%	13.1
Tensile Strength	ISO 13934-1:1999 C.R.E.CUT STRIP METHOD	KGF/5CM	WARP : 236.4 WEFT : 218.1
Tearing Strength	ISO 13937-2:2000 C.R.E.SINGLE TEAR METHOD	KGF	WARP : 35.0 WEFT : 28.2
Elongation	ISO 13934-2:2000 C.R.E.CUT STRIP METHOD	%	WARP : 19.2 WEFT : 22.6
Adhesion Strength	ISO 2411.C.R.E	KGF/5CM	3.2
Flexing Endurance at Low Temp.	DIN 53351	CYCLES	54
Resistance to Low Temp.	DIN 53351 -20°C, 5HRS		WARP : 99.2 WEFT : 98.8
Resistance to High Temp.	DIN 53351 80°C, 5HRS		WARP : 97.4 WEFT : 97.2
Practice for operating light-exp. With and without water	ASTM G 26, METHOD A, TYPE B, WEATHER-O-METER	GRADE	4